

# TITAN



TITAN WORLDWIDE INDUSTRIES LLC.

**1-800-436-8706**



All products meet and/or exceed the  
OSHA & ANSI requirements!



**WWW.TITANWWI.COM**

# TITAN



## ALUMINUM PUMP JACK

An aluminum Titan pump jack allows professionals to raise and lower a scaffolding platform to work safely at a height up to 48 feet. Our pump jacks are ideal for shingling, siding, building and construction, insulating, roofing, and home repair. OSHA-compliant.

## ALUMINUM PUMP JACK BENCH

Our Aluminum Pump Jack Work Bench can support 12" to 24" stages. They are compatible and interchangeable with the leading competitor. Meets all OSHA requirements.

## ALUMINUM POLES

We offer reliable, OSHA-compliant poles for pump jack systems. Available in 6 ft, 12 ft, 18 ft, & 24 ft. Pump jack poles manufactured in the USA (Green Bay, WI). Can be stacked with our aluminum inserts.

Model	Description	Approx. Wt.
Al Jack	Aluminum Pump Jack	33

Model	Description	Approx. Wt.
Al Bench	Pump Jack Bench	20

Model	Description	Approx. Wt.
Pole-6	6 feet	13
Pole-12	12 feet	26
Pole-18	18 feet	39
Pole-24	24 feet	52



# 1-800-436-8706



## PUMP JACK SAFETY NET

Our pump jack safety net is a 22 ft., nylon netting industrial strength guard rail net that attaches to the stages. Our safety nets meet all OSHA regulations.

## HEAVY DUTY POLE ANCHOR

Essential for any Pump Jack Structure. Long spike provides the added stability that you are looking for. Quality construction gives you the support you need.

## PUMP JACK BRACE

Our Brace is a key component of the Pump Jack Pole System. These high quality wall braces are used to secure the poles to the work wall. Heavy duty steel braces feature a full swivel head & nailing clips to cover all possible roof pitches. These provide rigid, triangular bracing as required by OSHA

## 6FT. ALUMINUM INSERT

Our Aluminum Pump Jack Insert is used when stacking aluminum poles for variable height. OSHA approved.

- Any 2 pole lengths can be easily connected and disconnected
- Designed with spring-loaded stainless steel pins

Model	Description	Approx. Wt.
AI Net	Safety Net	7

Model	Description	Approx. Wt.
10135	Heavy Duty Pole Anchor	10

Model	Description	Approx. Wt.
AI Brace	Pump Jack Brace	7

Model	Description	Approx. Wt.
AI Joint	6' Insert	9

# TITAN



## 16" LONG ROOF BRACKET

- All steel
- Holds up to a 6" wide plank
- Comes in 45°, 60°, and 90° angles

Model	Plank Size	Angle	Approx. Wt.
346	2" x 6"	45°	2
306	2" x 6"	60°	2
356	2" x 6"	90°	2



## ADJUSTABLE ROOF BRACKET

- All steel
- Holds up to a 10" wide plank
- Adjusts to 45°, 60°, and 90° angles

Model	Description	Approx. Wt.
400	Adjustable Roof Bracket	4



## ACRO RESIDENTIAL GUARDRAIL

This innovative full guardrail system is easy to install, move & remove without damaging shingles on any roof 16/12 pitch and under.

Model	Description	Dimensions	Approx. Wt.
12070	Complete System	43" x 8" x 4"	11
12055	Replacement Post	42" x 5" x 1"	4



## ROOF HOOK

### Model # 81DR

- Quality Steel roof hook, comes with wheel on back.
- Attaches to any style Extension Ladder

Model	Approx. Wt.
81DR Roof Hook	6




## FALL PROTECTION KIT

### Model # RK

Includes:  
Reusable roof bracket, harness, 6' Shock lanyard, 50' 5/8" Life line, 5/8" Rope grab, Tool bag

Model	Approx. Wt.
RK Roofer's Kit	16

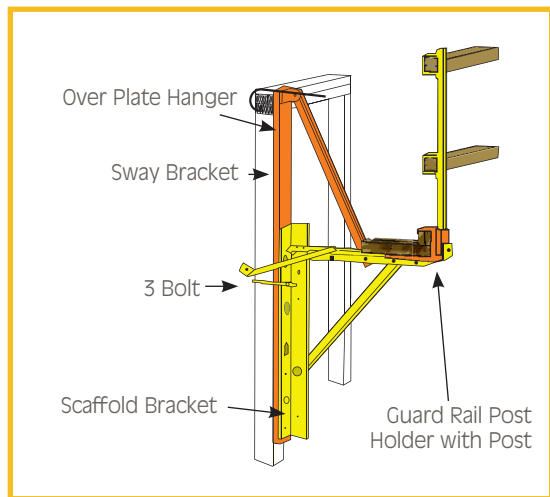

## ROOF GUARD RAIL

Use the Guard Rail Post Holder with Post to attach rails and secure the platforms for the work crew. This attaches to the Wall Brackets.

Model	Description	Approx. Wt.
12020	Over Plate Hanger	8
12048	Scaffold Bracket 48"	20
12054	Corner Bracket	23
12056	Guard Rail Post Holder with Post	6

# 1-800-436-8706



**OSHA APPROVED**

## 1-Man 250 Lbs. / 12" Wide

Model	Description	Approx. Wt.
11220	12" x 20'	61
11224	12" x 24'	72

## 2-Man 500 Lbs. / 14" Wide

Model	Description	Approx. Wt.
21412	14" x 12'	38
21416	14" x 16'	57
21420	14" x 20'	82
21424	14" x 24'	98

## 2-Man 500 Lbs. / 12" Wide

Model	Description	Approx. Wt.
21212	12" x 12'	37
21216	12" x 16'	54
21220	12" x 20'	77
21224	12" x 24'	92

## 2-Man 500 Lbs. / 20" Wide

Model	Description	Approx. Wt.
22012	20" x 12'	46
22016	20" x 16'	66
22020	20" x 20'	94
22024	20" x 24'	112

## 2-Man 500 Lbs. / 24" Wide

Model	Description	Approx. Wt.
22412	24" x 12'	47
22416	24" x 16'	73
22420	24" x 20'	102
22424	24" x 24'	122



**PER PAIR**



## ALUMINUM END RAIL SYSTEM

End Rail Systems are available and in stock. They are available in 12 in, 14 in, 20 in and 24 in. Each rail system is for one end of the stage and come with toe board.

Model	Description	Approx. Wt.
E12	12 in.	3
E14	14 in.	4
E20	20 in.	5
E24	24 in.	6

## SHORT BODY LADDER JACK

- Short body ladder Jacks extend to 2 rungs and will provide sturdy support
- Sold in Pairs
- Holds 12" and 14" plank

Model	Size	Approx. Wt.
LJSB	12" - 14"	14

## ALUMINUM RAIL SYSTEM

### Side Rail System - 1 side

Includes- Hand rail, posts & toe board

Model	Description	Approx. Wt.
RS16	16 ft.	43
RS20	20 ft.	48
RS24	24 ft.	55



# TITAN



## ALUMINUM EXTENSION LADDER

### Series 7000 TITAN

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

Model	Description	Approx. Wt.
7016	16 ft.	32
7020	20 ft.	39
7024	24 ft.	46
7028	28 ft.	53
7032	32 ft.	60
7036	36 ft.	77
7040	40 ft.	84



## FIBERGLASS EXTENSION LADDER

### Series 5000 TITAN

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

Model	Description	Approx. Wt.
5016	16 ft.	36
5020	20 ft.	44
5024	24 ft.	52
5028	28 ft.	59
5032	32 ft.	72
5040	40 ft. (250 capacity)	96



## FIBERGLASS EXTENSION LADDER

### Series 9000 TITAN

Type 1AA Extra Heavy Duty  
375 lbs. Duty Rating

Model	Description	Approx. Wt.
9016	16 ft.	39
9020	20 ft.	48
9024	24 ft.	56
9028	28 ft.	64
9032	32 ft.	74
9040	40 ft. (300 capacity)	126

# 1-800-436-8706



## FIBERGLASS STEP LADDER

### Series 1000 TITAN

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

## FIBERGLASS STEP LADDER

### Series 2000 TITAN

Type 1AA Extra Heavy Duty  
375 lbs. Duty Rating

*fiberglass*

## DOUBLE STEP LADDER

### Series 3000 TITAN

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

*fiberglass*

## DOUBLE STEP LADDER

### Series 4000 TITAN

Type 1AA Extra Heavy Duty  
375 lbs. Duty Rating

Model	Description	Approx. Wt.
1002	2 ft.	12
1003	3 ft.	14
1004	4 ft.	17
1005	5 ft.	20
1006	6 ft.	23
1008	8 ft.	30
1010	10 ft.	43
1012	12 ft.	52

Model	Description	Approx. Wt.
2004	4 ft.	18
2006	6 ft.	25
2008	8 ft.	33
2010	10 ft.	44
2012	12 ft.	54

Model	Description	Approx. Wt.
3003	3 ft.	18
3004	4 ft.	21
3006	6 ft.	29
3008	8 ft.	38
3010	10 ft.	57
3012	12 ft.	69

Model	Description	Approx. Wt.
4004	4 ft.	23
4006	6 ft.	33
4008	8 ft.	41
4010	10 ft.	60
4012	12 ft.	72
4014	14 ft.	93
4016	16 ft.	105

# TITAN



## FIBERGLASS PLATFORM LADDER

### Series 1300 TITAN

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

## TENACIOUS LADDER

### Multi-Function Ladder

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

## FIBERGLASS EXTENSION LADDER

*with Cable Hook V-Rung*

### Combination Installed

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

Model	Height to Platform	Wt.	Height
1303	3 ft.	25	5
1304	4 ft.	30	6
1306	6 ft.	42	8
1308	8 ft.	54	10
1310	10 ft.	64	12

Model	Step Height	Extension Height	Stair Height	Approx. Shipping Wt.
MFL-13	3' to 5'	7' to 11'	3' to 5'	32
MFL-15	4' to 7'	9' to 15'	4' to 7'	40
MFL-17	5' to 9'	11' to 19'	5' to 9'	47

Model	Description	Approx. Wt.
5028CB	28 ft.	63



# 1-800-436-8706



## ALUMINUM WORKSTAND

### AWS Series

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

Model	Description	Approx. Wt.
AWS2	27 1/2" X 2'	15
AWS3	27 1/2" X 3'	19
AWS4	27 1/2" X 4'	23



## FIBERGLASS STEP STOOL

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

Model	Description	Approx. Wt.
3002	15" X 2'	12



## FIBERGLASS WORK STAND

### FW Series

Type 1A Extra Heavy Duty  
300 lbs. Duty Rating

Model	Description	Approx. Wt.
FWS2	27 1/2" X 2'	17
FWS3	27 1/2" X 3'	24

Series  
6000



## FIBERGLASS SINGLE LADDER

### Series 6000 TITAN

Type 1A Extra Heavy Duty | 300 lbs. Duty Rating

## LADDER MITTS

### (2-Pack)

Ladder mitts fit the tops of extension ladders to prevent damage to wood, aluminum and vinyl siding.

Model	Description	Approx. Wt.
ACE135	2-Pack	1




## LADDER LEVELERS

### Model # Ace155

Instantly and automatically adjusts to any uneven surface. No levers, locks or pins to manually adjust.

Model	Description	Approx. Wt.
ACE155	Ladder Levelers	12




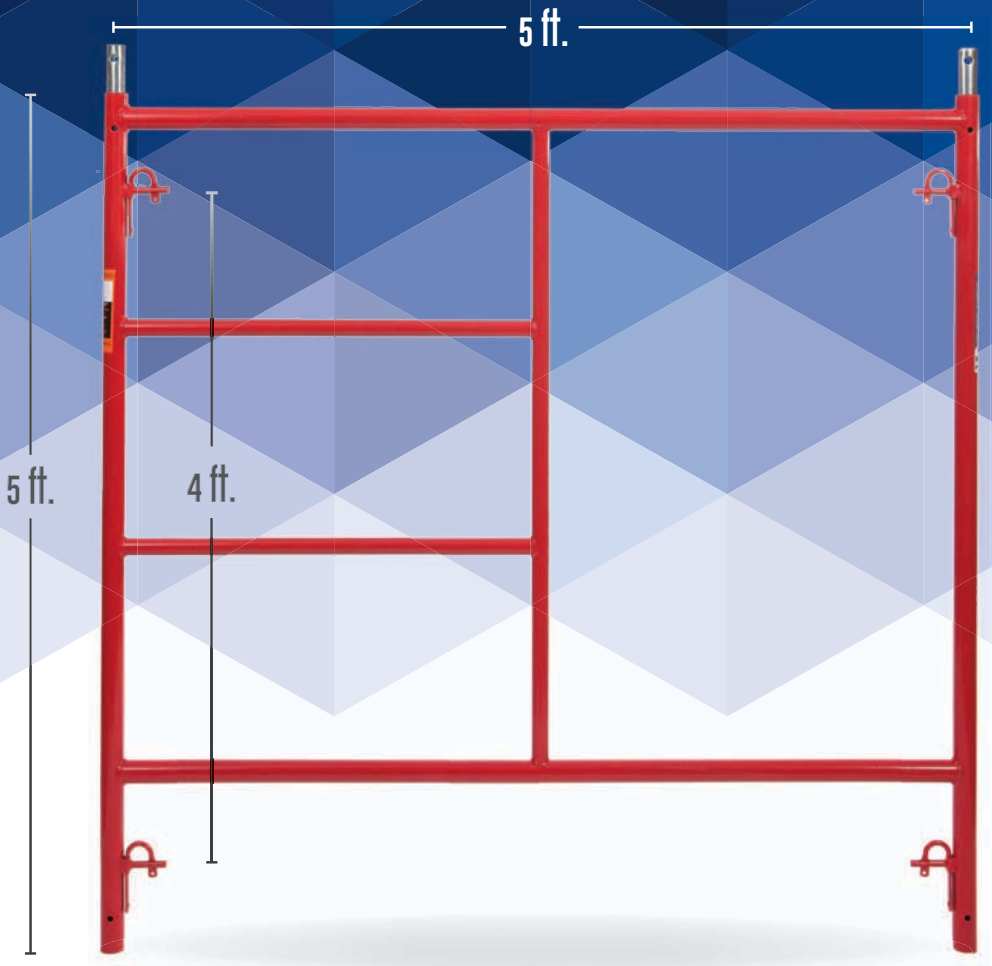

**5' x 5' WACO STYLE**


**Model # LF5R**  
1 Section includes-  
(2) 5' x 5' Frames  
(2) 7' Cross Braces  
(4) Stacking Pins  
  
Tubing Outside Diameter 1-5/8"  
Fast Lock  
Couplin Pin with NO collar included  
Powder Coated Red

Model	Description	Approx. Wt.
LF5R	5' x 5'	104/per section

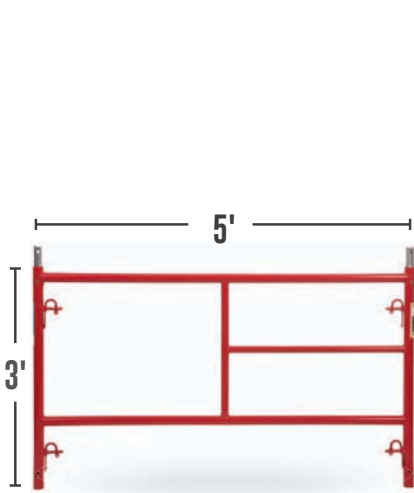


**5' x 3' WACO STYLE**

1 Section includes-  
(2) Frames, (2) Cross Braces (4) Stacking Pins

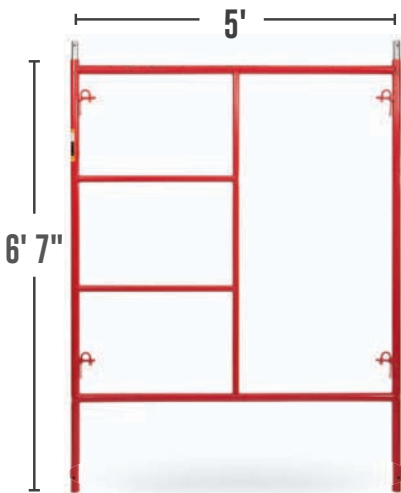

**5' x 6' 7" WACO STYLE**

1 Section includes-  
(2) Frames, (2) Cross Braces (4) Stacking Pins

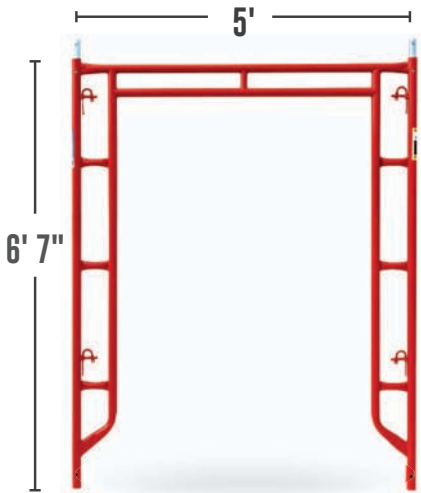

**5' x 6' 7" WACO STYLE**

1 Section includes-  
(2) Frames, (2) Cross Braces (4) Stacking Pins

Model	Description	Approx. Wt.
LF3R	5' x 3'	80/per section

Model	Description	Approx. Wt.
LF6R	5' x 6' 7"	134/per section

Model	Description	Approx. Wt.
OE6RHD	5' x 6' 7"	142/per section

# 1-800-436-8706



## MULTI FUNCTION SCAFFOLD

### 1000 lbs. Capacity

Powder coated yellow  
Complete Unit includes-

(2) Ends, (2) Trusses, (1) Plank & (4) Casters

Model	Description	Approx. Wt.
MFS	30" L x 6' W x 6' H	152



## OUTRIGGERS

### (Set of Four)

OSHA regulations require Guard Rail/Outriggers when stacking.

\*\* Outriggers DO NOT come with casters



## DRYWALL CART

### 3000 Lbs.

3000 lbs. Capacity Designed to haul full capacity loads with easy maneuverability and complete stability. Heavy Duty 8" Caster. 2 Rigid, 2 Swivel Casters.



## GUARDRAILS

### Model # MP-GR


Kit for 6 ft. Rolling Scaffold

Model	Description	Approx. Wt.
MP-OUT	Outriggers - set of 4	32

Model	Description	Approx. Wt.
DRY	Drywall Cart	90

Model	Description	Approx. Wt.
MP-GR	Guardrail Unit	68



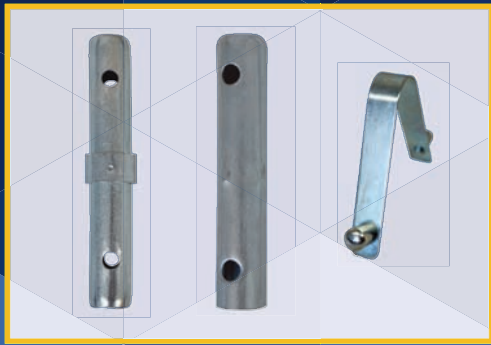

## COUPLING PINS & SPRING RETAINER


Model	Description	Approx. Wt.
SCP-SW7	1 7/16" Outer Diameter	1
SCP-SW6	1 3/8" Outer Diameter	1
SCP-SW5	1 1/4" Outer Diameter	1
CP-SW	Coupling Pin w/1" collar	1
SCP-WA	Coupling No collar	1
SPR	Spring Retainer	1



## TIE BRACE WITH CLAMP

The Tie brace is designed to attach your scaffold to building to meet OSHA specification. Our tie brace comes with pre-drilled holes to enable you to attach to corner or to flat walls. The Tie brace comes with the bar and the clamp to attach bar to scaffold.

Model	Description	Approx. Wt.
Tie Brace	20 in.	12

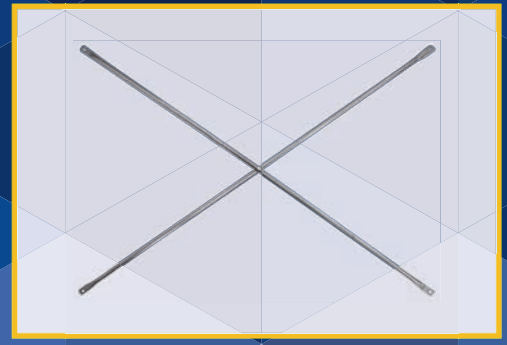

## GALVANIZED CROSS BRACES

Model	Description	Approx. Wt.
B102	10' 2 3/4"	17
B103	10' 5 5/16"	17
B104	10' 9 1/4"	17
B1027	10' 3 5/32"	17
B72	7' 3 3/8"	12
B73	7' 7 3/8"	12
B727	7' 4 15/32"	12
B74	8' 3/4"	12



## 20" ANGLE IRON SIDE BRACKET

Add a Side Bracket to your Scaffolding.


Model	Description	Approx. Wt.
SB-21A	20"	9



## 20" SADDLE SIDE BRACKET

20" Scaffolding side bracket (Saddle).  
2 board scaffold bracket. Powder coated yellow.

Model	Description	Approx. Wt.
SB-20	20 in.	9

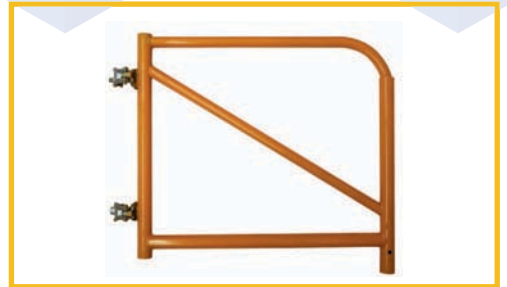

## ROLLING TOWER OUTRIGGERS

The outriggers do not come with casters or feet.


Model	Description	Approx. Wt.
RTO	27"H X 29"W	16



## DIAGONAL BRACES 5' X 7'

Diagonal brace connects from corner to corner.  
Keeps scaffold square.

Model	Description	Approx. Wt.
D-7	5' x 7'	14

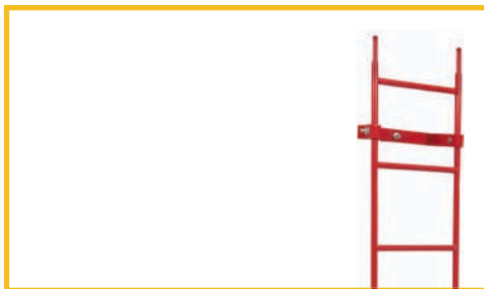

## 6 FT. ACCESS LADDER

Very Durable all steel access ladder.  
Brackets bolt directly to the scaffold.  
Each ladder comes with 1 bracket.

Model	Description	Approx. Wt.
ACC-6	6 ft.	25




## STEEL STAIR UNITS

7' long x 6'4" high steel stair unit. Comes with  
inside and outside handrail.

Model	Description	Approx. Wt.
ST7	7' x 6'4"	150

# 1-800-436-8706

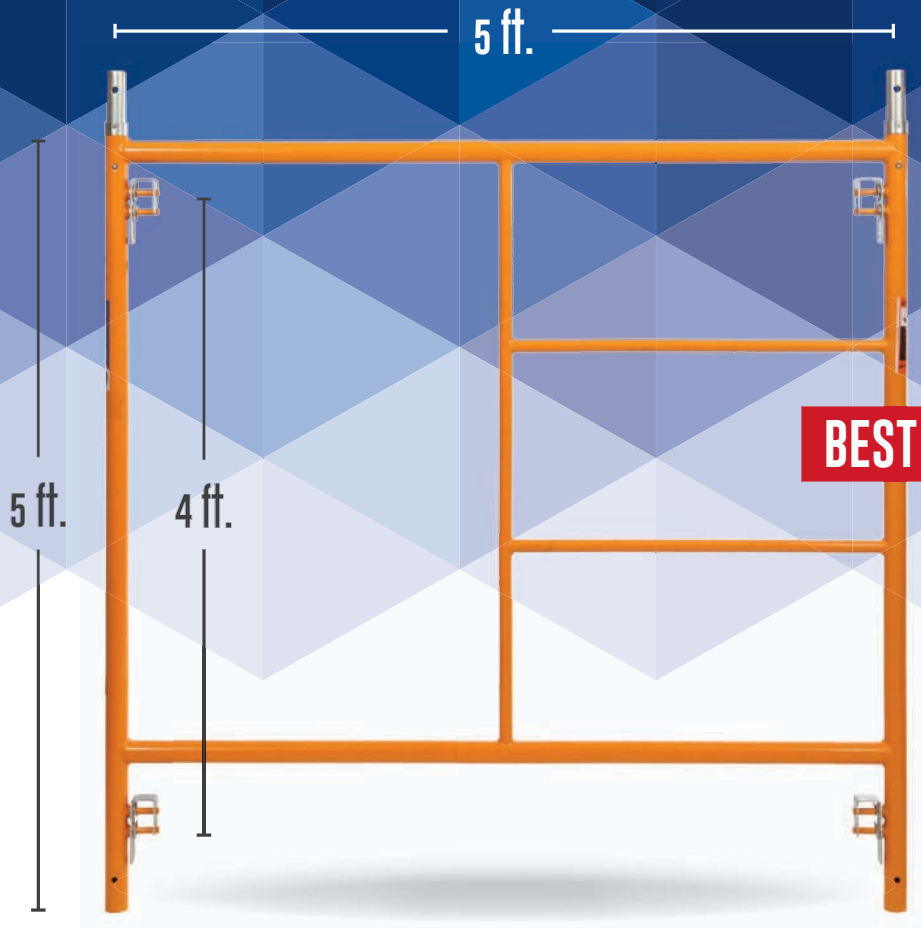

This scaffold comes with C-locks, the best & safest lock in the market.

## 5' x 5' PREMIUM SCAFFOLD

### Model # LF5Y

Tubing Outside Diameter 1-<sup>11</sup>/<sub>16</sub>"

C-Lock

Couplin Pins included

Powder Coated Yellow


1 Section Includes-

(2) 5' x 5' Frames

(2) 7' Cross Braces


(4) Stacking Pins

Model	Description	Approx. Wt.
LF5Y	5' x 6' 4"	102/per section

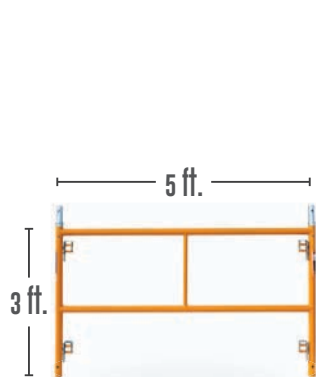


## 5' x 3' SCAFFOLD FRAME

- Tubing Outside Diameter 1<sup>11</sup>/<sub>16</sub>"
- C-Lock
- Coupling Pins included
- Powder Coated Yellow

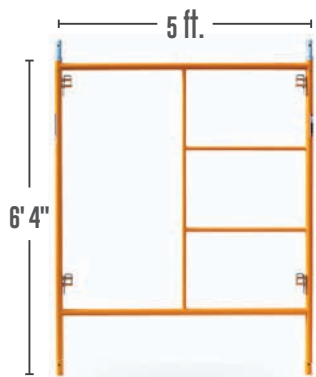


## 5' x 6' 4" SCAFFOLD FRAME

- Tubing Outside Diameter 1<sup>11</sup>/<sub>16</sub>"
- C-Lock
- Coupling Pins included
- Powder Coated Yellow

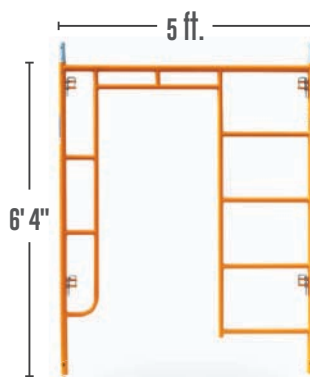

## 5' x 6' 4" WALK THRU

- Tubing Outside Diameter 1<sup>11</sup>/<sub>16</sub>"
- C-Lock
- Coupling Pins included
- Powder Coated Yellow

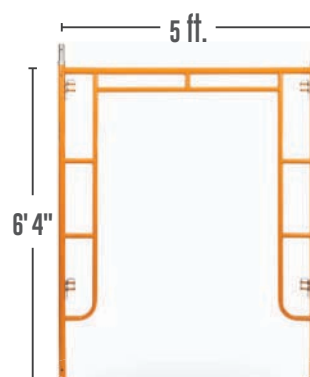

## 5' x 6' 4" WALK THRU

- Tubing Outside Diameter 1<sup>11</sup>/<sub>16</sub>"
- C-Lock
- Coupling Pins included
- Powder Coated Yellow

Model	Description	Approx. Wt.
LF3Y	5' x 3'	78/per section

Model	Description	Approx. Wt.
LF6Y	5' x 6' 4"	132/per section

Model	Description	Approx. Wt.
OE6YL	5' x 6' 4"	136/per section

Model	Description	Approx. Wt.
OE6Y	5' x 6' 4"	132/per section



### UNEVEN SURFACE LEVELING JACK

Uneven Surface Leveling Jack with welded swivel base plate. For use on uneven surface 1 3/8" diameter. 24" High w/ 18" of adjustment.

Model	Description	Approx. Wt.
SJ	24" High	14



### LEVELING JACK WITH BASE PLATE

Leveling Jack with base plate 1 3/8" diameter. 24" high with 18" of adjustment.

Model	Description	Approx. Wt.
ALSO	24" High	14



### LEVELING JACK WITH SOCKET

Leveling Jack with socket is for use with casters & base plates 1 3/8" diameter. 24" High with 18" of adjustment

Model	Description	Approx. Wt.
ALBP	24" High	14



### 8" CASTER

Use these Casters on the base of your scaffolding for easy movement. 500 lb capacity & locking mechanism for safety.

Model	Description	Stem	Approx. Wt.
C8	8" Caster	1-3/8" stem	12
C8S	8" Caster	1-1/4" stem	12



### TOGGLE PIN

Locks scaffold sections together for safety. Made of Solid Steel. 1 3/4" long.

Model	Description	Approx. Wt.
TP	Toggle Pin	13 lbs / 100



### PIGTAIL PIN

Gravity Pin • Locks scaffold sections together for safety. Made of Solid Steel. Wrap around pin for secure locking.

Model	Description	Approx. Wt.
GP	Pig Tail Pin	13 lbs / 100



### BASE PLATE

Add more stability to your scaffold structures with a base plate. Can also be used with the leveling jack with socket end.

Model	Description	Approx. Wt.
C8	8" Caster	3



### MORTAR BOARD

20" x 30"  
Collapsible Mortar Stand.

Model	Description	Approx. Wt.
MBS	20" x 30"	12 lbs



### WELL WHEEL & HOIST ARM

Well Wheel • All Steel • 12 in. Diameter  
Transfer materials up/down scaffolding with this simple & effective tool.

Hoist Arm • 75 lbs. Capacity - For use with a well wheel.

Model	Description	Approx. Wt.
HA	Hoist Arm	25 lbs
WW	Well Wheel	15 lbs



# 1-800-436-8706



## ALUMINUM SCAFFOLD PLANK

### Walk Board With Plywood Top (19" Wide Plywood Deck)

We offer choices of 7-foot 75 pounds per square foot, and 10-foot decks 50 pounds per square foot. Both provide a stable work platform atop your scaffolding structures.

Model	Description	Approx. Wt.
AP-7	19" x 7'	30
AP-10	19" x 10'	42



## ALL ALUMINUM SCAFFOLD PLANK

We offer two sizes in aluminum decks, both provide a stable work platform atop your scaffolding structures. Our 7ft. deck handles 75 lbs. per sq. ft., while the 10ft. deck handles 50 lbs. per sq. ft. These planks can be used in either supported or suspended scaffolding systems.


Model	Description	Approx. Wt.
AP-7A	19" x 7'	30
AP-10A	19" x 10'	40



## LAMINATED SCAFFOLD GRADE PLANK


10" Wide

Model	Description	Approx. Wt.
PL-8LAM	2" X 10" X 8'	26
PL-12LAM	2" X 10" X 12'	39
PL-16LAM	2" X 10" X 16'	52

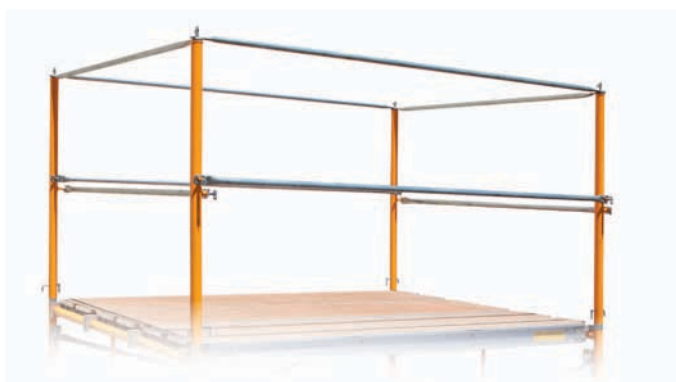

## GUARDRAIL SYSTEM

Model	Description	Approx. Wt.
GRP	Guard Rail Posts	9
GR-5	5 ft. Rail	4
GR-7	7 ft. Rail	5
GR-10	10 ft. Rail	11

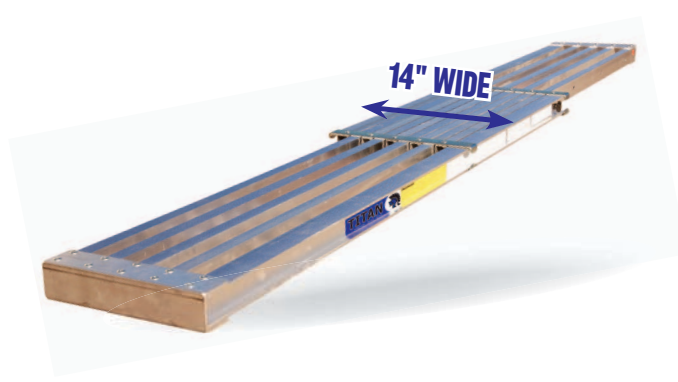

## ALUMINUM EXTENSION PLANK

- 3 Lengths Available
- 14" Wide
- 250 lb capacity
- OSHA-compliant

Model	Description	Approx. Wt.
EXT 6	6 ft. - 9 ft.	34
EXT 8	8 ft. - 13 ft.	44
EXT 10	10 ft. - 13 ft.	55

# TITAN



TITAN WORLDWIDE INDUSTRIES LLC.

## 1-800-436-8706

### LOCATIONS-

633 N. MILITARY AVE.  
GREEN BAY WI, 54313

5 CORPORATE DR.  
CRANBURY, NJ 08512

# Free Shipping

On All Orders Over...

